

## Simulation of D-Statcom and Dvr in Power Systems

Pankaj Dahire<sup>1</sup>, Mr. Abhishek Mishra (Assistant professor)<sup>2</sup>

<sup>1,2</sup>(Department of Electrical and Electronics Engineering, Dr. C.V. Raman University, Bilaspur (C.G.)

### ABSTRACT

Power quality problem results in a failure or a mis-operation of end user equipments. Utility distribution networks, sensitive industrial loads and critical commercial operations suffer from various types of outages and service interruptions which can cost significant financial losses. In developing countries like India, where the variation of power frequency and many such other determinants of power quality are themselves a serious question, it is very vital to take positive steps in this direction. The present work is to identify the prominent concerns in this area and hence the measures that can enhance the quality of the power are recommended. In this paper the techniques of correcting the supply voltage sag, swell and interruption in a distributed system is discussed. A DVR injects a voltage in series with the system voltage and a D-STATCOM injects a current into the system to correct the voltage sag, swell and interruption. Comprehensive results are presented to assess the performance of each device as a potential custom power solution.

**Keywords:** D-Statcom, DVR, voltage dips, swells, interruption, power quality, VSC.

### I. INTRODUCTION

One of the most common power quality problems today is voltage dips. A voltage dip is a short time (10 ms to 1 minute) event during which a reduction in r.m.s voltage magnitude occurs. It is often set only by two parameters, depth/magnitude and duration. The voltage dip magnitude is ranged from 10% to 90% of nominal voltage (which corresponds to 90% to 10% remaining voltage) and with a duration from half a cycle to 1 min. In a three-phase system a voltage dip is by nature a three-phase phenomenon, which affects both the phase-to-ground and phase-to-phase voltages. A voltage dip is caused by a fault in the utility system, a fault within the customer's facility or a large increase of the load current, like starting a motor or transformer energizing. Typical faults are single-phase or multiple-phase short circuits, which leads to high currents. The high current results in a voltage drop over the network impedance. At the fault location the voltage in the faulted phases drops close to zero, whereas in the non-faulted phases it remains more or less unchanged [1, 2].

Voltage dips are one of the most occurring power quality problems. Off course, for an industry an outage is worse, than a voltage dip, but voltage dips occur more often and cause severe problems and economical losses. Faults due to lightning, is one of the most common causes to voltage dips on overhead lines. If the economical losses due to voltage dips are significant, mitigation actions can be profitable for the customer and even in some cases for the utility. Since there is no standard solution which will work for every site, each mitigation action must be carefully planned and evaluated. There are different ways to mitigate voltage dips, swell and interruptions in transmission and distribution systems. At present, a wide range of very flexible controllers, which capitalize on newly available power electronics components, are emerging for custom power applications [3, 4]. Among these, the distribution static compensator and the dynamic voltage restorer are most effective devices, both of them based on the VSC principle. A PWM-based control scheme has been implemented to control the electronic valves in the two-level VSC used in the D-STATCOM and DVR [5, 6].

### II. VOLTAGE SOURCE CONVERTERS (VSC)

A voltage-source converter is a power electronic device, which can generate a sinusoidal voltage with any required magnitude, frequency and phase angle. Voltage source converters are widely used in adjustable-speed drives, but can also be used to mitigate voltage dips. The VSC is used to either completely replace the voltage or to inject the 'missing voltage'. The 'missing voltage' is the difference between the nominal voltage and the actual. The converter is normally based on some kind of energy storage, which will supply the converter with a DC voltage. The solid-state electronics in the converter is then switched to get the desired output voltage. Normally the VSC is not only used for voltage dip mitigation, but also for other power quality issues, e.g. flicker and harmonics.

#### 2.1 Basic Power System with RLC Load

A basic Power system considered contains a three phase source, a three phase transformer and an RLC Load as shown in the figure below.

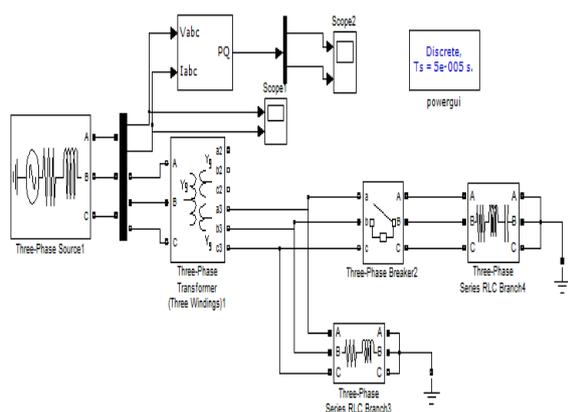


Figure - 1. A Basic Power System

## 2.2 Series voltage controller [Dynamic Voltage Restorer, (DVR)]

The series voltage controller is connected in series with the protected load as shown in Fig.1. Usually the connection is made via a transformer, but configurations with direct connection via power electronics also exist. The resulting voltage at the load bus bar equals the sum of the grid voltage and the injected voltage from the DVR. The converter generates the reactive power needed while the active power is taken from the energy storage.

The energy storage can be different depending on the needs of compensating. The DVR often has limitations on the depth and duration of the voltage dip that it can compensate.

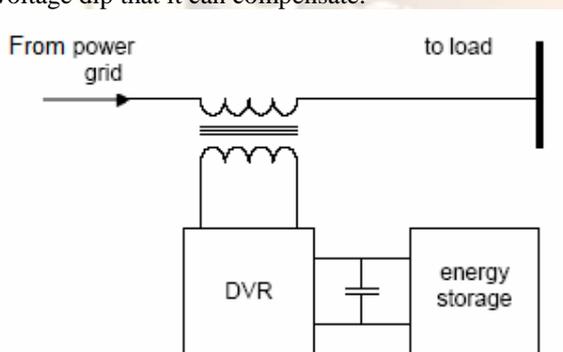


Figure-2. Example of a standard configuration for a DVR

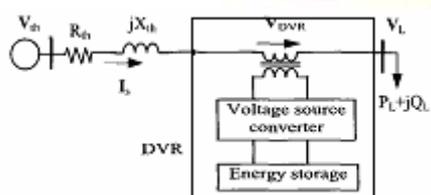


Figure-3. Schematic diagram of a DVR

The circuit on left hand side of the DVR represents the Thevenin equivalent circuit of the system. The system impedance  $Z_{th}$  depends on the fault level of the load bus. When the system voltage

( $V_{th}$ ) drops, the DVR injects a series voltage  $V_{DVR}$  through the injection transformer so that the desired load voltage magnitude  $V_L$  can be maintained. The series injected voltage of the DVR can be written as,

$$V_{DVR} = V_L + Z_{th} I_L - V_{th}$$

Where

$V_L$  is the desired load voltage magnitude

$Z_{th}$  is the load impedance

$I_L$  is the load current

$V_{th}$  is the system voltage during fault condition

The load current  $I_L$  is given by,

$$I_L = \left( \frac{(P_L + jQ_L)}{V_L} \right)^*$$

When  $V_L$  is considered as a reference, eqn. (4.1) can be rewritten as,

$$V_{DVR} \angle \alpha = V_L \angle 0 + Z_{th} I_L \angle (\beta - \theta) - V_{th} \angle \delta$$

Here  $\alpha$ ,  $\beta$  and  $\delta$  are the angle of  $V_{DVR}$ ,  $Z_{th}$  and  $V_{th}$  respectively, and  $\theta$  is the load power factor angle,

$$\theta = \tan^{-1} (Q_L / P_L).$$

The complex power injection of the DVR can be written as,

$$S_{DVR} = V_{DVR} I_L^*$$

It may be mentioned here that when the injected voltage  $V_{DVR}$  is kept in quadrature with  $I_L$ , no active power injection by the DVR is required to correct the voltage. It requires the injection of only reactive power and the DVR itself is capable of generating the reactive power. Note that DVR can be kept in quadrature with  $I_L$  only up to a certain value of voltage sag and beyond which the quadrature relationship cannot be maintained to correct the voltage sag. For such a case, injection of active power into the system is essential. The injected active power must be provided by the energy storage system of the DVR.

### 2.2.1 Controller

The aim of the control scheme is to maintain constant voltage magnitude at the point where a sensitive load is connected, under system disturbances. The control system only measures the r.m.s voltage at the load point, i.e., no reactive power measurements are required. The VSC switching strategy is based on a sinusoidal PWM technique which offers simplicity and good response. Since custom power is a relatively low-power application, PWM methods offer a more flexible option than the Fundamental Frequency Switching (FFS) methods favored in FACTS applications. Besides, high switching frequencies can be used to improve on the



A D-STATCOM (Distribution Static Compensator), which is schematically depicted in Figure-10, consists of a two-level Voltage Source Converter (VSC), a dc energy storage device, a coupling transformer connected in shunt to the distribution network through a coupling transformer. The VSC converts the dc voltage across the storage device into a set of three-phase ac output voltages. These voltages are in phase and coupled with the ac system through the reactance of the coupling transformer. Suitable adjustment of the phase and magnitude of the D-STATCOM output voltages allows effective control of active and reactive power exchanges between the D-STATCOM and the ac system. Such configuration allows the device to absorb or generate controllable active and reactive power.

The VSC connected in shunt with the ac system provides a multifunctional topology which can be used for up to three quite distinct purposes:

1. Voltage regulation and compensation of reactive power;
2. Correction of power factor; and
3. Elimination of current harmonics.

Here, such device is employed to provide continuous voltage regulation using an indirectly controlled converter.

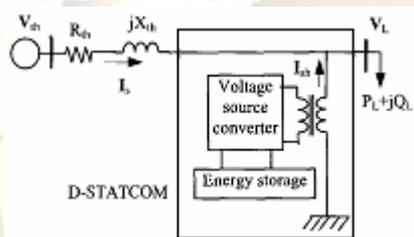


Figure-7. Schematic diagram of a D-STATCOM.

Figure-10 the shunt injected current  $I_{sh}$  corrects the voltage sag by adjusting the voltage drop across the system impedance  $Z_{th}$ . The value of  $I_{sh}$  can be controlled by adjusting the output voltage of the converter.

The shunt injected current  $I_{sh}$  can be written as,

$$I_{sh} = I_L - I_s = I_L - \frac{V_{th} - V_L}{Z_{th}}$$

$$I_{sh} \angle \eta = I_L \angle -\theta - \frac{V_{th}}{Z_{th}} \angle (\delta - \beta) + \frac{V_L}{Z_{th}} \angle -\beta$$

The complex power injection of the D-STATCOM can be expressed as,

$$S_{sh} = V_L I_{sh}^*$$

It may be mentioned that the effectiveness of the D-STATCOM in correcting voltage sag depends on the value of  $Z_{th}$  or fault level of the load bus. When the shunt injected current  $I_{sh}$  is kept in quadrature with  $V_L$ , the desired voltage correction can be achieved

without injecting any active power into the system. On the other hand, when the value of  $I_{sh}$  is minimized, the same voltage correction can be achieved with minimum apparent power injection into the system. The control scheme for the D-STATCOM follows the same principle as for DVR. The switching frequency is set at 475 Hz.

### 2.2.1 Test system

Figure-8 shows the test system used to carry out the various D-STATCOM simulations

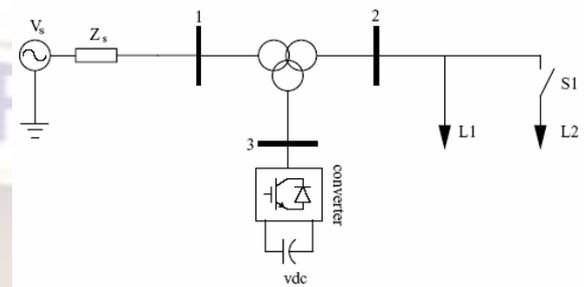


Figure-8. Single line diagram of the test system for D-STATCOM.


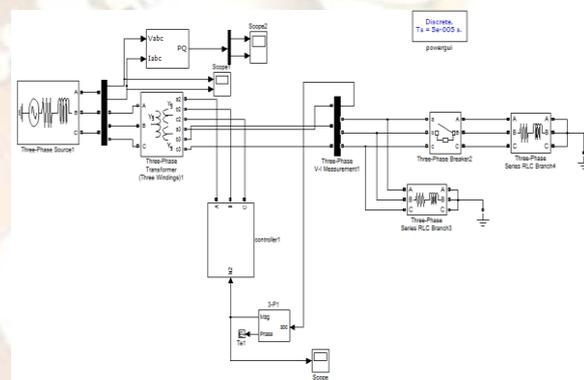


Figure-9. Simulink model of D-STATCOM test system.


Figure-8 shows the test system implemented in MATLAB SIMULINK. The test system comprises a 230kV, 50Hz transmission system, represented by a Thevenin equivalent, feeding into the primary side of a 3-winding transformer connected in Y/Y/Y, 230/11/11 kVA varying load is connected to the 11 kV, secondary side of the transformer. A two-level D-STATCOM is connected to the 11 kV tertiary winding to provide instantaneous voltage support at the load point. A 750  $\mu$ F capacitor on the dc side provides the D-STATCOM energy storage capabilities. To show the effectiveness of this controller in providing continuous voltage regulation, simulations were carried out with and with no D-STATCOM connected to the system. The D-STATCOM model which is incorporated in the transmission system for voltage regulation is as shown in Figure-9.

## III. SIMULATON RESULTS


### 3.1 Simulation results of Basic Power System

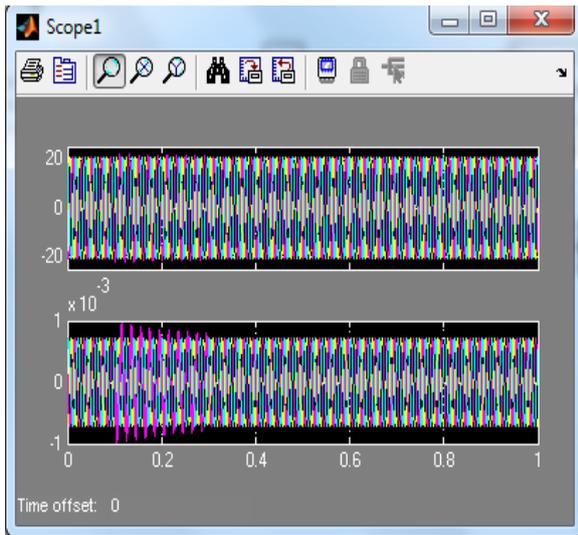


**Figure-10** Input Voltage and Current  
 The Input voltage and current . There is fluctuation in current between 0.1 to 0.3.

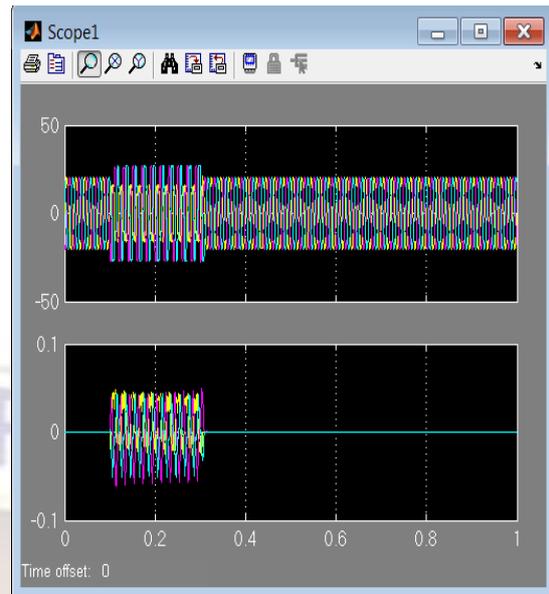


**Figure-13** Voltage and Current fluctuating between 0.1 to 0.3

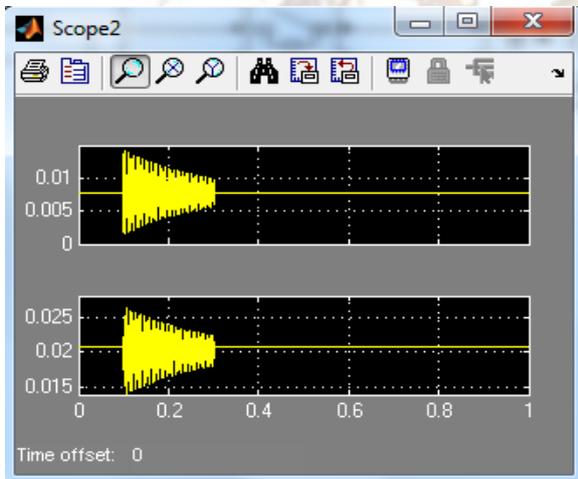


**Figure-11** The Active and Reactive Power

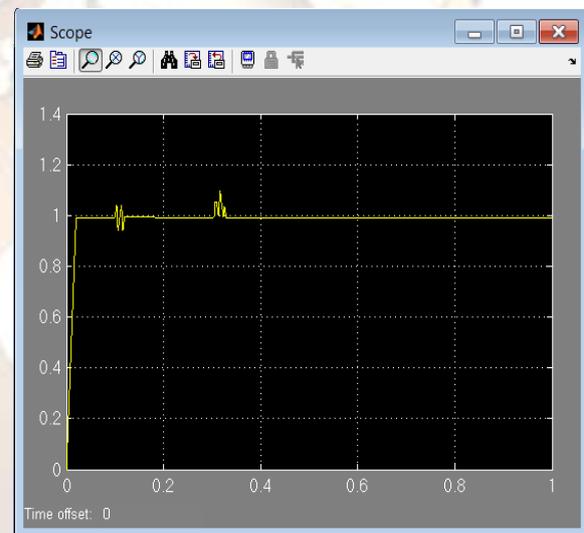


**Figure-14** DSTACOM Compensating between 0.1 to 0.3

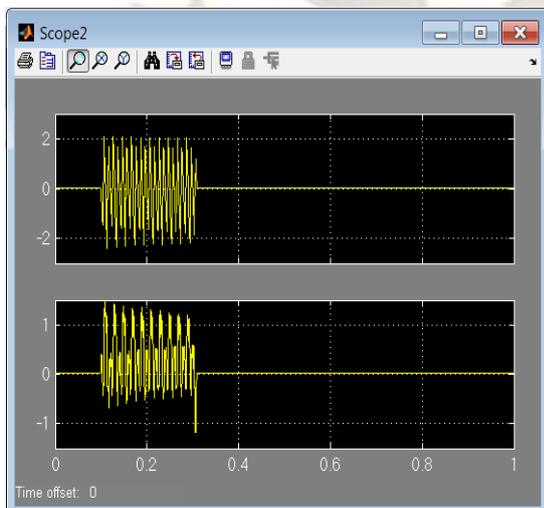


**Figure-12** Active and Reactive power with DSTACOM

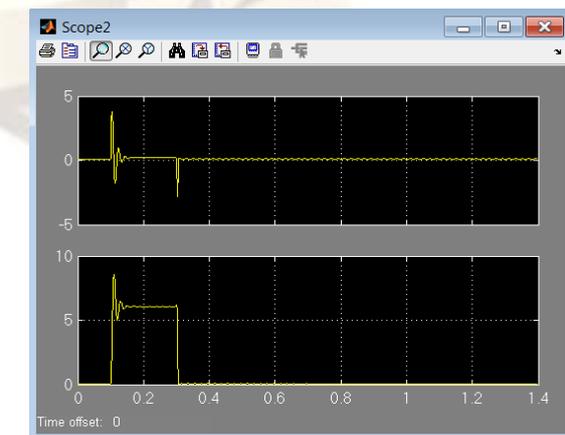

**Figure-15** Active and Reactive power with DVR

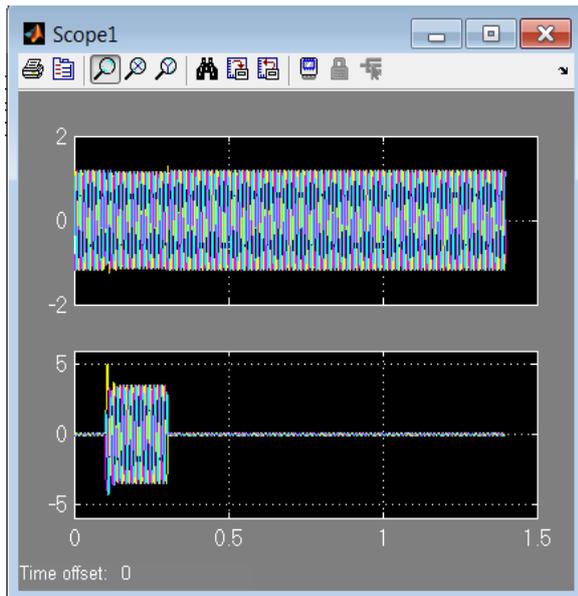

**Figure-16** Voltage and Current fluctuating between 0.1 to 0.3

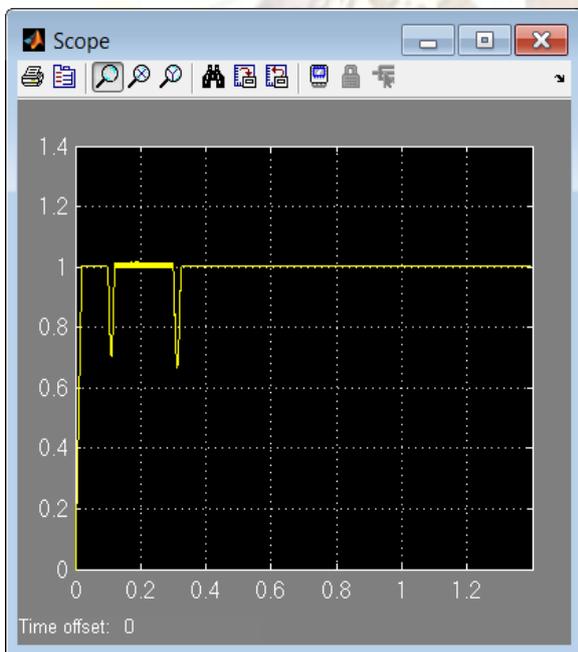

**Figure-17** DVR Compensating between 0.1 to 0.3

#### IV. CONCLUSIONS

This paper has presented the power quality problems such as voltage dips, swells and interruptions, consequences, and mitigation techniques of custom power electronic devices DVR, D-STATCOM, and SSTS. The design and applications of DVR, D-STATCOM and SSTS for voltage sags, interruptions and swells, and comprehensive results are presented.

It was also observed that the capacity for power compensation and voltage regulation of DVR and D-STATCOM depends on the rating of the dc storage device.

#### REFERENCES

- [1] G. Yaleinkaya, M.H.J. Bollen, P.A. Crossley, "Characterization of voltage sags in industrial distribution systems", IEEE transactions on industry applications, vol.34, no. 4, July/August, pp. 682-688, 1999.
- [2] Haque, M.H., "Compensation of distribution system voltage sag by DVR and D-STATCOM", Power Tech Proceedings, 2001 IEEE Porto, vol.1, pp.10-13, Sept. 2001.
- [3] Anaya-Lara O, Acha E., "Modeling and analysis of custom power systems by PSCAD/EMTDC", IEEE Transactions on Power Delivery, Vol.17, Issue: 1, Jan. 2002, Pages:266 – 272
- [4] Bollen, M.H.J., "Voltage sags in three-phase systems" Power Engineering Review, IEEE, Vol. 21, Issue: 9, Sept. 2001, pp: 8 - 11, 15.
- [5] M.Madrigal, E.Acha., "Modelling of Custom Power Equipment Using Harmonic Domain Techniques", IEEE 2000.
- [6] R.Miensi, R.Pawelek and I.Wasiak., "Shunt Compensation for Power Quality Improvement Using a STATCOM controller: Modelling and Simulation", IEEE Proce., Vol.151, No.2, March 2004.